


RECUPMIL'S static and mobile

- Static or mobile vacuum plants for a selective suction of fluids
- Maximal suction force : 99% of vacuum
- Simultaneous suction of several fluids
- Transfer tanks with maxi level obturator
- Tank emptying device by overpressure

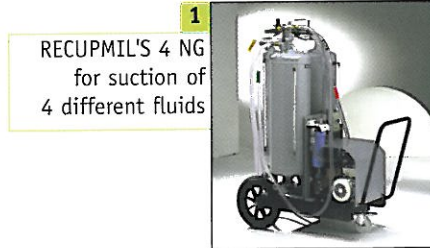

Characteristics

For more details on EVISA range, report to page 6.

TYPE	NOMINAL CAPACITY m ³ .h ⁻¹		POWER kW		RECEIVER CAPACITY L	NOISE LEVEL dB (A)	OIL FILLING L	WEIGHT kg
	50 Hz	60 Hz	50 Hz	60 Hz				
	■ RECUPMIL'S 4 NG 1	30	36	0,75				




TYPE	NOMINAL CAPACITY m ³ .h ⁻¹		POWER kW		RECEIVER CAPACITY L	NOISE LEVEL dB (A)	OIL FILLING L	WEIGHT kg
	50 Hz	60 Hz	50 Hz	60 Hz				
	■ E25	30	36	0,75				
■ E40	47	56	1,1	1,30	62	1,5	45	
■ E65	65	78	1,5	1,80	65	4	70	
■ E100	96	115	2,2	2,64	67	4	80	

Dimensions

Storage receivers

CAPACITY L	WIDTH mm	DEPTH mm	HEIGHT mm	RECEIVER WEIGHT kg
50*	300	300	1280	30
100	400	400	1570	45
200	500	500	1570	80
500	600	930	2050	140
1500	1100	1470	2520	300
3000	1400	1770	2520	400
5000	1600	1950	3100	500

Pump mounted on receiver from 500 L model
* wall fixation

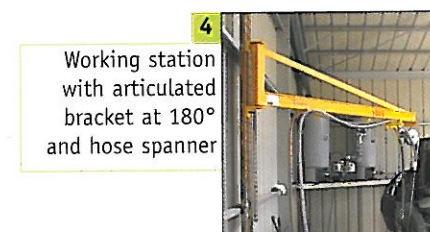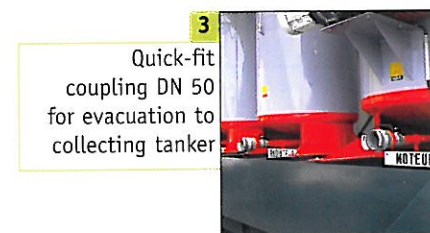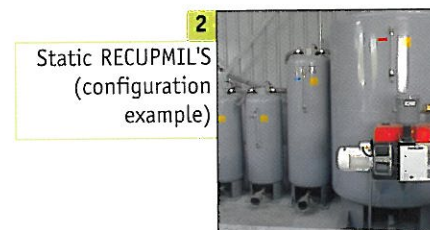

Mobile RECUPMIL'S	WIDTH mm	DEPTH mm	HEIGHT mm
■ RECUPMIL'S 4 NG	1200	700	1600

Vacuum plants for fluid transfer

Plant references

1 ■ RECUPMIL'S NG 4	1-ph 230V	970202			
Static RECUPMIL'S		■ E25	■ E40	■ E65	■ E100
EVISA vacuum pump	3-ph 400V+N+E	970035	970036	970037	970038
Drain trap protection		Type I NG 870041		Type II NG 870042	
Mechanical obturator (1 per tank)		1"1/4		770045	
Heating starting board (with solenoid valve, timer and hourmeter)		770463	719872	770464	770531
Overpressure emptying at 0,5 bar		670527		670528	
2 Equipped vacuum tank (from 2 to 6 maxi)	total cap. from 0 to 3 500 L : flow rate 25m ³ /h ¹	20L : 670103	1500L : 670051	50L wall fix. : 670143	500L+E65 : 670091
	total cap. from 3500 to 5000L : flow rate 40m ³ /h ¹	50L : 670143	3000L : 609404	100L + 20L : 670132	1500L + E25/E40 : 670092
	total cap. from 5000 to 7500L : flow rate 65m ³ /h ¹	100L : 670048	5000L : 670053	200L + Pot I : 670142	1500L + E65 : 617104
	total cap. from 7500 to 10000L : flow rate 100m ³ /h ¹	200L : 670049		200L + 20L + Pot I : 670125	3000L + E25/E40 : 670093
		500L : 670050		500L + E25/E40 : 670090	3000L + E65/E100 : 670156
6 Fluid level sensor at 75% with red flashing light					616742
3 DN 50 adaptor with plug for collect by tanker (option for storage receiver)					670071

Tool references

4 1 st solution with bracket					
Bare articulated bracket		2 m	3 m	4 m	5 m
		359107	359108	359109	359110
Support guide for hoses	1 hose	2 hoses	3 hoses	4 hoses	5 hoses
	670056	670057	670058	670104	670105
Tightener without stop (one per hose required)	358010				
Tightener with stop (one per hose required)	358180				
5 2 nd solution with hose reel					
Articulated automatic winder with network connection Ø20, length 500 and wall bracket	1 winder	2 winders	3 winders	4 winders	5 winders
	613447	613448	613449	613450	613451
Retention vat (one per winder)	360015				
Suction hose Ø20 length 6m with gun valve and quick connector	713452				
Suction hose Ø20 length 6m with butterfly BS 3/4" valve, quick connector and PVC adaptor	713453				
Complete set of nozzles	1 Ø4 long. 400 pot for brake fluid	1 cooling fluid	1 Ø4 x 6 length 1000 oil nozzle	1 PVC pipe	713353
	1 spider for brake fluid drain	1 overpressure pot adaptor	1 Ø6 x 8 length 1000 oil nozzle	1 Ø20 length 1000	
			1 Ø8 x 10 length 1000 oil nozzle		
Nozzles storage and PLASTICARBU support	613361				
Support metallic plate for 2 tanks of 100 L or 2 tanks of 200 L with drain trap and E 25 EVISA pump	213488				
Mobile oil drain system volume (70 L capacity) with plug valve and emptying hose	813364				
Gear box and motor oil casing driller	916053				

