


TECHNICAL SPECIFICATIONS

Li-Ion Batery voltage	20 V
Li-Ion Battery Cappacity	2,0 Ah / 4,0 Ah
90 min battery charger	240 - 220 V / 50 - 60 Hz
Maximum pressure	700 bar (10,000 psi)
Safety valve maximum set pressure	500 bar (7,250 psi)
Flow - high	160 g/min (5.7 oz/min)
Flow - low	100 g/min (3.6 oz/min)
Grease cartridges per battery charge ⁽¹⁾	24 (2 Ah battery) - 40 (4 Ah battery)
Display functions	Battery level gauge, grease meter, grease level gauge, stall alarm, loss of prime alarm.
Measure units	grams, ounces
LED flashlight	Yes, with on/off function
Hose length	1.100 mm (44")
Shoulder strap	Included
Grease gun weight	3,2 kg (7 lb)

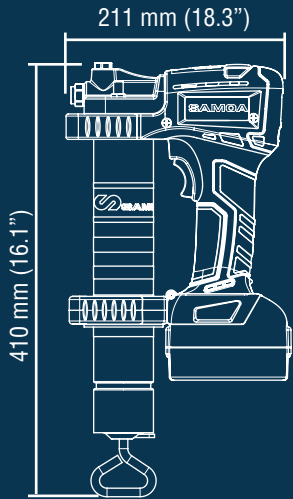

⁽¹⁾ Low speed - low flow mode.
Number of 400 g grease cartridges per charge for 4.0 Ah grease gun through grease hose and grease coupler and grease fitting: 23 cartridges.
Number of 400 g grease cartridges per charge for 4.0 Ah grease gun through grease hose and grease coupler and no grease fitting: 36 cartridges.
Number of 400 g grease cartridges per charge for 4.0 Ah grease gun at free delivery, with no grease hose, grease coupler or grease fitting: 40 cartridges.
Number of 400 g grease cartridges per charge may vary depending on several factors, such as the battery charge, working pressure or grease viscosity.

ORDER INFORMATION

All models include one battery, battery charger, carrying case and one grease gun complete with delivery hose and grease coupler.

MODEL NUMBER

160 500	Battery grease gun with 1 x 2 Ah battery pack. 240 - 220 V / 50 - 60 Hz, up to 24 cartridges per battery charge
160 510	Battery grease gun with 1 x 4 Ah battery pack. 240 - 220 V / 50 - 60 Hz, up to 40 cartridges per battery charge

ACCESSORIES

169 503	Carrying case
169 012	Grease outlet hose
169 500	Battery charger
169 020	2 Ah - 20 V Lithium-Ion battery pack
169 021	4 Ah - 20 V Lithium-Ion battery pack



V. Løwener A/S
Smedeland 2 - 2600 Glostrup - telefon nr. 43 200 300
E-mail: vl@loewener.dk - www.loewener.dk

For mere information kontakt:
Peter Savioli på mobil nr. 4064 3040 eller psa@loewener.dk



20 V Akku Fedtpresse



20 V Grease Gun

- 2 Ah or 4 Ah Lithium Ion battery
- Dual mode flow rate:
 - Low flow: 100 g/min (3.6 oz/min)
 - High flow: 160 g/min (5.7 oz/min)
- Up to 700 bar (10,000 psi) maximum pressure (limited to 500 bar - 7,250 psi with safety valve)
- Up to 40 grease cartridges per battery charge (see product technical specifications)

Multi-function LCD

LCD display provides real time critical information for keeping full control

CE UK EAC

