

ERGO LIFT 1000 ROLL




Powered exclusively by compressed air, the ERGO LIFT 1000 ROLL can lift and manoeuvre vehicles of up to 2.5 tonnes. With 4 support arms that swivel and lock automatically, it can be adapted to suit all chassis types. Ergonomically designed, it has a lifting height of around 1 m, so you can work upright around the vehicle to avoid fatigue.

- Super-compact: 10 cm in minimum position on the ground.
- Conforms to standard EN 1493 (load reversibility).
- Extremely useful in workshops with limited space.
- Mobile, can be manoeuvred easily with 4 wheels.





Work from a standing position to help prevent musculoskeletal injuries (MSDs).

Sturdy, highly stable, warp-resistant scissor construction.




Handle to position the support arms with an automatic locking system (with or without load).

Supplied with 8 rubber pads

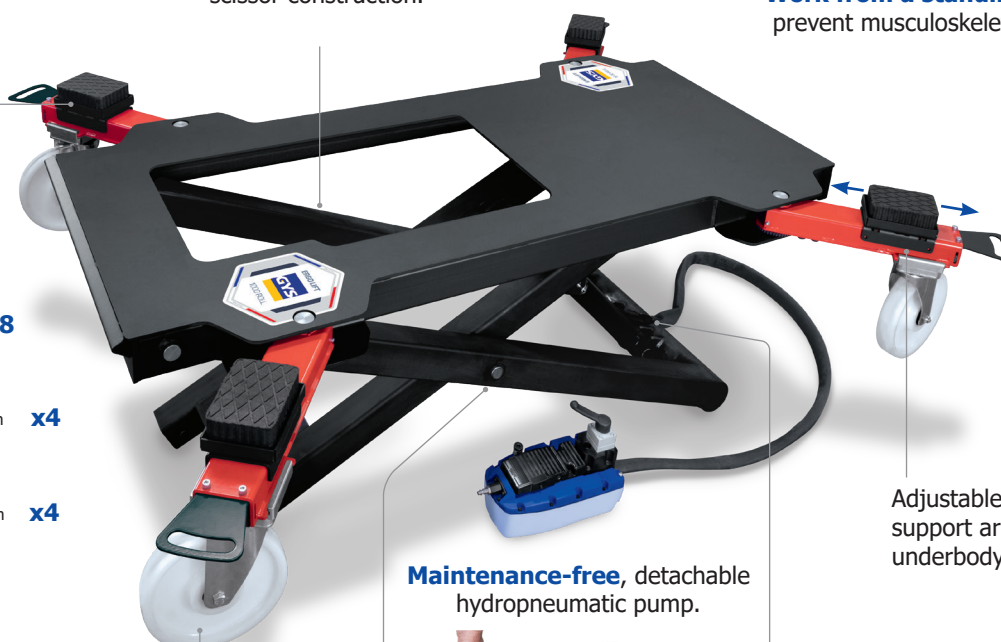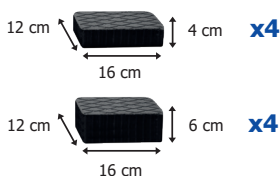

Adjustable sliding skid on the support arms to leave the underbody accessible.

Maintenance-free, detachable hydropneumatic pump.




Hydraulic safety system with automatic scissor lock in the event of hose rupture.










4 large attachable wheels can be used to transform the lift into a mobile carriage, enabling the vehicle to be manoeuvred easily around the workshop.

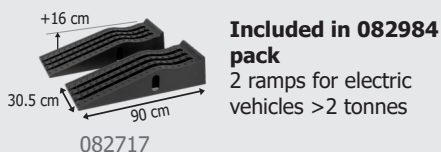All axles are fitted with bronze bushes with a self-lubricating coating, which require no maintenance.



Optional accessories



 max	 minimum	 maximum	 1 500 kg	 2 500 kg	 max.		IP	 kg	 226 cm x 115 cm product delivered on pallet
2.5 T	10 cm	95 cm	45 sec.	60 sec.	8 bar	260 cm	IP54	396	437 kg (lift only)