



TESA
TECHNOLOGY

2026-1 **Hits**



SMART
MEASUREMENT
SOLUTIONS

Version EN-DKK

Valid until 30.06.2026
Prices exclude VAT



[TESAtechnology.com](https://www.tesa-technology.com)



TWIN-CAL IP67 universal digital caliper

- ▶ Ultra-robust construction for maximum reliability and consistently stable results over time
- ▶ Long battery life for extended work without interruptions or frequent replacements
- ▶ Simplified connectivity with fast data transfer to the computer via TLC port (wired or wireless)



More details on page 9

Article number	Measuring range, mm	Degree of protection	Resolution mm	Depth rod	Data output	List price DKK	Promo price DKK
00530319	0 ÷ 150	IP67	0,01	Square	TLC	1635	1305
00530320	0 ÷ 150	IP67	0,01	Round	TLC	1635	1305
00530321	0 ÷ 150	IP67	0,01	Round	TLC	1643	1313
00530322	0 ÷ 200	IP67	0,01	Square	TLC	2205	1763
00530323	0 ÷ 300	IP67	0,01	Square	TLC	2835	2243

Trio-Pack: 3 universal digital calipers TWIN-CAL IP67



THINK BIG!
With the Trio-Pack each instrument is only 1228 DKK!

Article number	Measuring range mm	Degree of protection	Resolution mm	Depth rod	Data output	List price DKK	Promo price DKK
00530319P	0 ÷ 150	IP67	0,01	Square	TLC	4605	3683
00530320P	0 ÷ 150	IP67	0,01	Round	TLC	4605	3683



TESA-CAL IP67 universal digital caliper

- ▶ Enhanced protection against liquids and dust for reliable use even in demanding environments
- ▶ Optimal readability thanks to a large high-contrast screen for immediate visual recognition
- ▶ Long battery life, reducing battery replacements and ensuring uninterrupted use



Article number	Measuring range mm	Degree of protection	Resolution mm	Depth rod	List price DKK	Promo price DKK
00530140	0 + 150	IP67	0,01	Square	1043	818
00530141	0 + 150	IP67	0,01	Round	1043	818
00530142	0 + 200	IP67	0,01	Square	1508	1193
00530143	0 + 300	IP67	0,01	Square	2048	1635

Trio-Packs: 3 universal digital calipers TESA-CAL IP67



THINK BIG!
With the Trio-Pack each instrument is only 788 DKK!

Article number	Measuring range mm	Degree of protection	Resolution mm	Depth rod	List price DKK	Promo price DKK
00530140P	0 + 150	IP67	0,01	Square	2955	2363
00530141P	0 + 150	IP67	0,01	Round	2955	2363



RUBYTAST analogue lever-type dial test indicators

- ▶ Quick and unambiguous reading thanks to the high-contrast dial, large numbers, and uniform hand rotation
- ▶ Consistent precision and reproducible results thanks to the 7-jewel precision movement, resistant to magnetic fields
- ▶ Workshop-ready robustness with fully metal construction, shockproof movement, and a 240° tilting ruby tip



Article number	Measuring range mm	Circular scale	Resolution mm	Rotary dial Yes/No	Ø Dial mm	List price DKK	Promo price DKK
01811000	0,8	0 ÷ 0,4 ÷ 0	0,01	Yes	28	1508	1193
01811001	0,2	0 ÷ 100 ÷ 0	0,002	Yes	38	1793	1433






Analogue dial gauges

- ▶ 0.01 mm resolution with measuring ranges of 5 mm and 10 mm to cover a wide range of inspection applications
- ▶ Shock-resistant design and robust construction ensure reliable and reproducible measurements in industrial environments
- ▶ Fast and precise reading thanks to the high-contrast dial, adjustable tolerance indicators, and interchangeable M2.5 tips



Article number	Measuring range, mm	Travel / revolution, mm	Shockproof mechanism	Degree of protection	Circular scale	Rotary dial Yes/No	Ø Dial mm	List price DKK	Promo price DKK
01419047	5	0,5	With	IP40	0 + 25 + 50	Yes	40	968	773
01419048	10	1	With	IP40	0 + 50 + 100	Yes	58	638	510

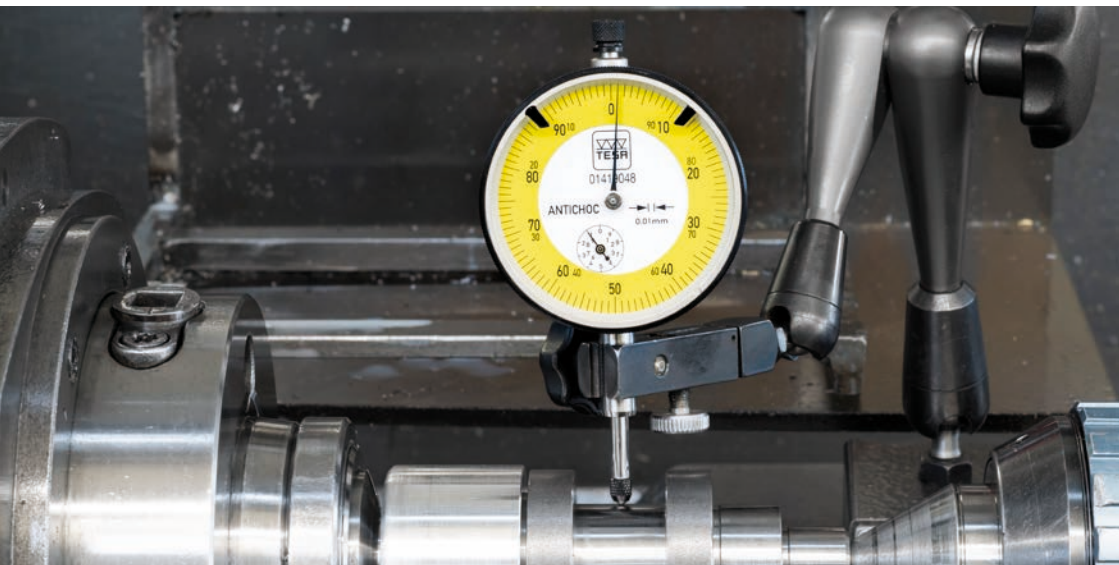

Measuring supports

- ▶ Easy height and angle adjustment to meet different measurement requirements
- ▶ User-friendly and intuitive design
- ▶ Designed for simplicity, allowing intuitive use in various applications
- ▶ Increased efficiency during installation
- ▶ Simplified setup with quick adjustments, optimizing workflow efficiency



Article number	Designation	List price DKK	Promo price DKK
01639061	Magnetic support with articulated arm, H = 310 mm	2663	2130
01639062	Magnetic support with articulated arm, H = 390 mm	3270	2610
01639070	Magnetic support EASY	1890	1493
00160201	Micrometer stand with 16 mm clamp aperture	1095	870

The digital dial gauges shown in the illustrations are not included with the above items.





MICROMASTER digital external micrometers

- ▶ Robust construction for reliable and long-term stable results
- ▶ Good protection against liquids and dust, even in the most demanding environments
- ▶ Extended battery life for longer work periods without interruptions



More details on page 9

Article number	Designation	Measuring range, mm	Degree of protection	Resolution mm	Data output	List price DKK	Promo price DKK
06030020	MICROMASTER IP54	0 + 30	IP54	0,001		3360	2685
06030030	MICROMASTER IP54 RS	0 + 30	IP54	0,001	Opto-RS232	3675	2940





TESA μ -Finder set 31



More details on page 9

The ideal solution for measuring form errors, such as:

- ▶ Radial play
- ▶ Alignment checking
- ▶ Or comparative measurement

The set includes:

- ▶ A multifunction portable display
- ▶ A bidirectional lever probe
- ▶ A universal magnetic base
- ▶ A set of batteries for the display



Article number	Designation	List price DKK	Promo price DKK
04430013P1	TESA μ -FINDER set with GT31 lever probe	21120	16875

Description
TESA μ -FINDER set 31
<i>Composed of:</i>
TWIN-T10 display unit
GT31 probe, with lever, $\pm 0,3$ mm, force = 0,1 N, radial cable
UJ15 magnetic support





Data transmission

Automated data transfer to secure your measurements in real time, with the following features:

- ▶ Connection of up to 40 instruments possible
- ▶ TLC-BLE transmitter to connect your digital instrument
- ▶ Wired or wireless solution, depending on your needs
- ▶ IP67 protection rating guaranteed for use in demanding environments
- ▶ DATA-VIEWER software for export in Excel, CSV, Q-DAS, and many other formats



The DATA-VIEWER software is free and can be used with all instruments with a TLC connection.

Article number	Designation	List price DKK	Promo price DKK
04760178	Opto-RS232 to TLC adapter	1568	1410
04760181	TLC-USB cable, 2 m	1103	990
04760183	TLC-BLE Bluetooth® emitter + USB dongle receiver + 1,5 m extension cable set	765	683
04760184	TLC-BLE Bluetooth® emitter	443	398
04761062	Opto-RS232 to USB cable, duplex, 2 m	2483	2228
04760182	TLC-DIGIMATIC cable, 2 m	2280	2048



TESA-HITE MAGNA 1D manual height gauge

- ▶ Large color display for comfortable reading, even in dark environments
- ▶ Long battery life (60 h) to avoid frequent recharging
- ▶ Quick access to the first measurement upon power-on (<4 s) for significant time savings
- ▶ Free SCS certificate included to avoid extra recalibration costs immediately after the initial purchase



**DKK
25650**

00730082



More details on page 9



Article number	Measuring range, mm	Max. perm. errors, μm	Repeatability limit, μm	Execution	Resolution mm	Data output	List price DKK	Promo price DKK
00730082	0 + 415	≤ 8	On surface: ≤ 3 On arc: ≤ 5	Manual	0,001 / 0,005 / 0,01	TLC	28508	25650
00730083	0 + 715	≤ 8	On surface: ≤ 3 On arc: ≤ 5	Manual	0,001 / 0,005 / 0,01	TLC	33158	29813



MICRO-HITE+M 2D motorised height gauge

- ▶ Intuitive hybrid interface with color touchscreen and full keyboard, including a simplified keyboard for immediate and effortless operation
- ▶ Extended battery life thanks to a replaceable rechargeable battery and a second spare battery for continuous use
- ▶ Advanced versatility with multitasking and multi-user functions to meet all your needs
- ▶ Free SCS certificate included to avoid additional recalibration costs immediately after the initial purchase

4
YEARS
WARRANTY



More details on page 9



00730079



Article number	Measuring range, mm	Max. perm. errors, μm	Repeatability limit, μm	Execution	Resolution mm	Data output	List price DKK	Promo price DKK
00730079	0 ÷ 365	1,8 + 2L	On surface: $\leq 0,5$ On arc: ≤ 1	Motorised	0,0001 / 0,001 / 0,01	TLC, USB	64995	58425
00730080	0 ÷ 615	1,8 + 2L	On surface: $\leq 0,5$ On arc: ≤ 1	Motorised	0,0001 / 0,001 / 0,01	TLC, USB	69953	62925

L in m



TWIN-SURF roughness gauge

- ▶ Ultra-compact, portable, and robust for easy use anywhere
- ▶ High-contrast display for optimal readability, even in dark environments
- ▶ Interchangeable probes for maximum flexibility according to your needs
- ▶ Ideal for use in production environments or for entry inspection
- ▶ Standard version connectable to a computer via cable
- ▶ Bluetooth® version for wireless connection to a computer, tablet, or smartphone
- ▶ Free TESA DATA-STUDIO software (basic version) included to create measurement reports, manage statistics, and configure settings



06930014



Article number	Designation	List price DKK	Promo price DKK
06930014	TWIN-SURF roughness gauge	21443	19275
06930015	TWIN-SURF roughness gauge, Bluetooth® version	23018	20700

The TWIN-SURF (Bluetooth® version) is only available in countries where it is officially certified. Visit our website to know the list of countries in which this product is available.



We reserve the right to make changes to our products, especially due to technical improvements and further developments. All illustrations and technical data are therefore without guarantee. All prices shown are non-binding price recommendations.