

TECHNICAL DATA

SINGLE DIRECTION VIBRATORY PLATES

BP 20/45



Compact

Guide handle without tool folding - fits in any car boot



Plug and Play retrofit kits


Assembly in no time at all - machine can be individually customised



All-round protection

Protective bar and cyclone filter (GX 160) as standard

Shipping dimensions in cub.yd
BP 20/45 0,243

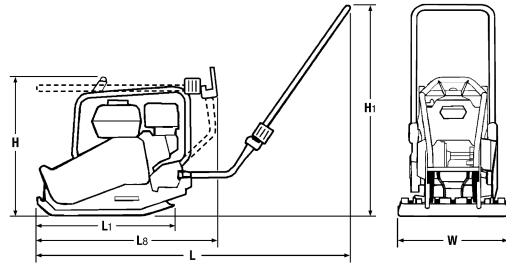

Standard Equipment

- Vibration insulated steering handle, foldable
- Detachable steering handle
- Hand-arm vibrations <5m/s²
- Cyclone dust separator
- Engine protection frame
- Automatic shutdown at low oil level
- Highly wear resistant base plate
- Recoil starter
- Fully protected V-belt
- Carrying handles
- Single point lifting device
- 3-2-1 Warranty

Optional Equipment

- Sprinkler system (2.6gal)
- Sprinkler system (1.8gal)
- Spraying system, base plate (17.7in)
- Transport wheels
- Vulcolan mat
- Hour meter
- Special painting
- Service Kit
- Tool kit

Dimensions in inch

	H	H1	L	L1	L8	W
BP 20/45	22.3	33.9	50.2	22.0	28.7	17.7

Technical Data

**BOMAG
BP 20/45**

Weights

Operating weight CECE	lb	203
Basic weight	lb	201

Dimensions

Working width	in	17.7
---------------------	----	------

Driving Characteristics

Working speed, max.	ft/min	98.4
Max. gradeability (dep. on soil con.)	%	30

Drive

Engine manufacturer		Honda
Engine type		GX 160
Emission stage		Stage V / CARB P.3
Cooling		air
Number of cylinders		1
Performance SAE J 1349	hp	4.8
Speed	rpm	3,600
Drive system		mech.
Fuel		Gasoline
Fuel consump. aver. during operation	gal/h	0.3

Exciter system

Frequency	vpm	5,400.0/0.0
Centrifugal force	lb	4,496
Amplitude	in	0.079

Capacities

Fuel	gal	0.8
------------	-----	-----

Technical modifications reserved. Machines may be shown with options.



PRUS 834 96 010

080725 Sa

BOMAG Americas, Inc.
 125 Blue Granite Parkway
 Ridgeway, SC 29130
 USA
 Tel. +1 803 3370700
 Fax +1 803 3370800
 www.bomag.com/us

